

# BSMP PAVA Series

Flexible Mechanical Expansion Joint Cover

**LATHAM AUSTRALIA PTY LTD**  
 14 TENNYSON ROAD GLADESVILLE 2111 AUSTRALIA  
 Phone: 61 2 9879 7888 Fax: 61 2 9879 7666  
 Web: www.latham-australia.com




ILLUSTRATED: BSMP PAVA

Not to Scale

All dimensions are to be verified before construction

Verified By..... Date.....

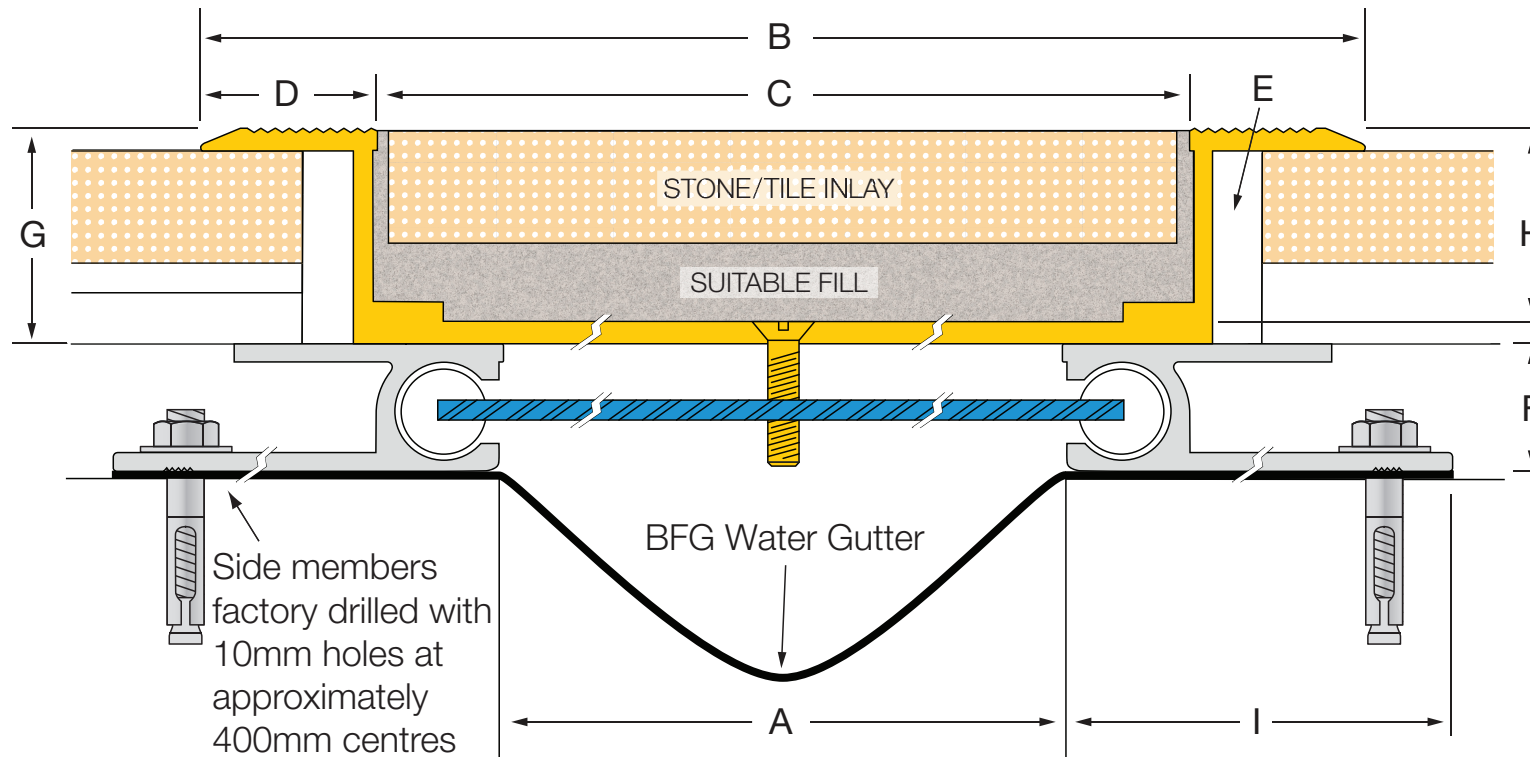

Contact your Latham Representative to discuss the application and specification of this system.

Brass Code Serrated Flange	A	B	C	D	E	F	G	H	I	Movement	Total Movement	Cover Thickness
BSMP-25	25	261	200	31	12	22	41	37	100	+20/-15mm	35mm	4mm
BSMP-50	50	261	200	31	12	22	41	37	100	+/-20mm	40mm	4mm
BSMP-75	75	261	200	31	12	22	41	37	100	+/-20mm	40mm	4mm
BSMP-100	100	261	200	31	12	22	41	37	100	+/-20mm	40mm	4mm

All dimensions are in millimetres.

Suitable for joint widths up to 100mm. The minimum overall recess required to accommodate this system regardless of the joint width is 315mm. Recessing of the stone as detailed above is not necessary. The product can simply sit on the surface of the stone as per photo.

Exterior/Interior applications.

Aluminium fixed members with brass coverplate.

All mechanical expansion joint fixings by others.

The centering bar consists of two full nylon cylinders fastened at opposite ends of a flat spring steel bar. The bar is positioned diagonally across the joint opening with the cylinders inside the extruded cylindrical tracks.

Design subject to change without notice

COPYRIGHT © 2009  
LATH3513