



# Latham Flat-Line Series Aluminium Expansion Joint Cover C-50 to C-150

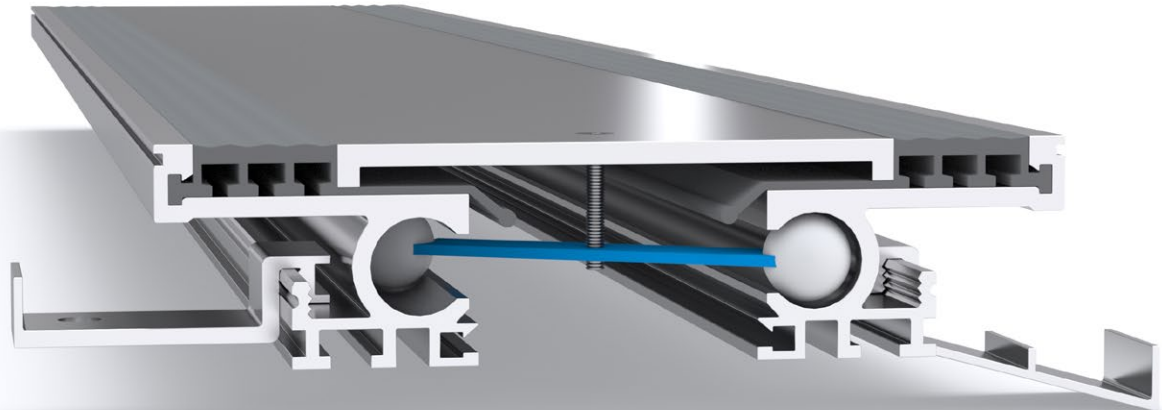

Illustrated: C-50

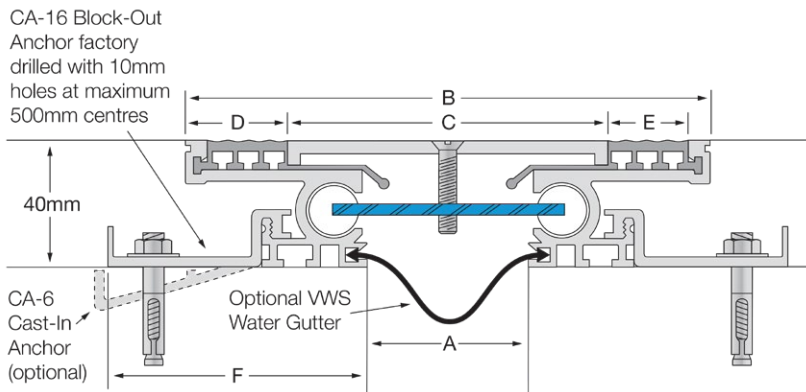

Aluminium Code	Coverplate Type	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
C-50	Smooth	50	164	100	33	25	82	+/-8mm	16mm	40mm
C-100	Smooth	100	214	150	33	25	82	+/-8mm	16mm	40mm
C-150	Smooth	150	264	200	33	25	82	+/-8mm	16mm	40mm

## FEATURES

- Aluminium floor expansion joint cover.
- Robust system suited to pedestrian applications where even the slightest bump in a floor can not be tolerated.
- 40mm depth below floor finish.
- Installed in a preformed recess or cast-in.

## MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Extruded vinyl inserts.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

## FIXINGS

- Supplied with clip-on CA-16 Block-Out Anchors (10mm holes pre-drilled) installed at ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional 6-way movement



indoor use



VWS water gutter