



Latham Flat-Line Series Brass Expansion Joint Cover NBBL

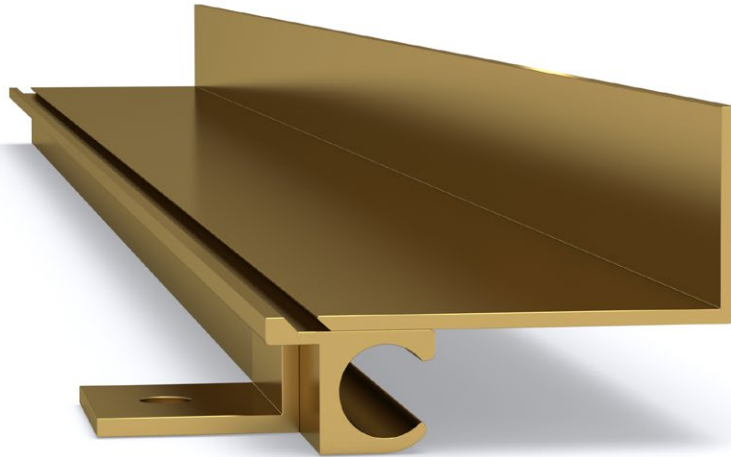

Illustrated: NBBL-55

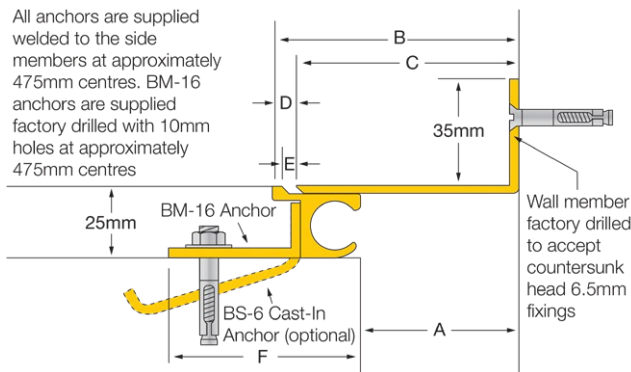

Solid Brass Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBBL-55	55	87	78	8	3	66	+22/-3mm	25mm	25mm	3mm
NBBL-80	80	111	103	8	3	66	+22/-3mm	25mm	25mm	3mm
NBBL-105	105	136	128	8	3	66	+22/-3mm	25mm	25mm	3mm
NBBL-130	130	161	153	8	3	66	+22/-3mm	25mm	25mm	3mm

FEATURES

- Solid brass floor-to-wall expansion joint cover.
- Pedestrian applications where even the slightest bump in a floor can not be tolerated.
- Robust system suited to pedestrian applications.
- 25mm depth below floor finish.
- Installed in a preformed recess or cast-in.

side members at ~475mm centres with pre-drilled holes for 10mm fasteners.

- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

MATERIALS

- Brass 380 mill finish alloy.
- Supplied in 4000mm lengths (cover plates in 1800mm lengths).

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)

FIXINGS

- Supplied with BM-16 Block-Out Anchors welded to the



multi directional
6-way movement



indoor use



factory
curvable