



# Latham Seismic Series Aluminium Expansion Joint Cover MLSM

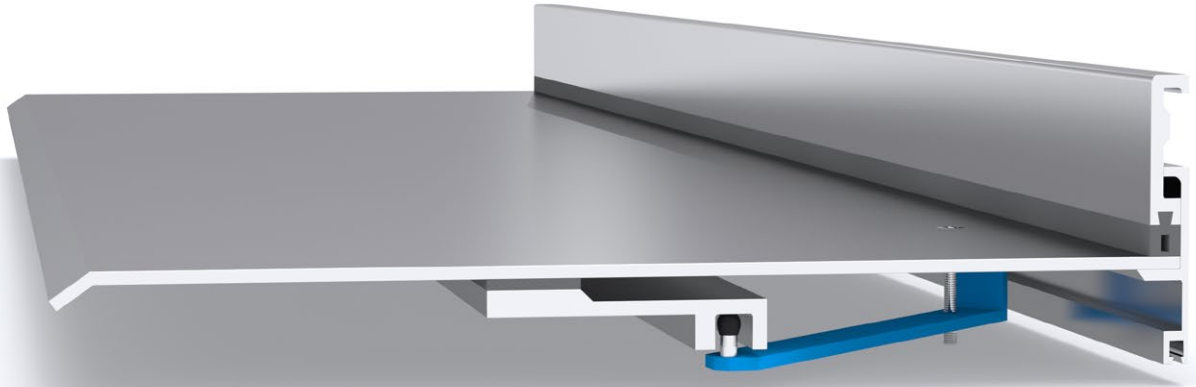

Illustrated: MLSM-100

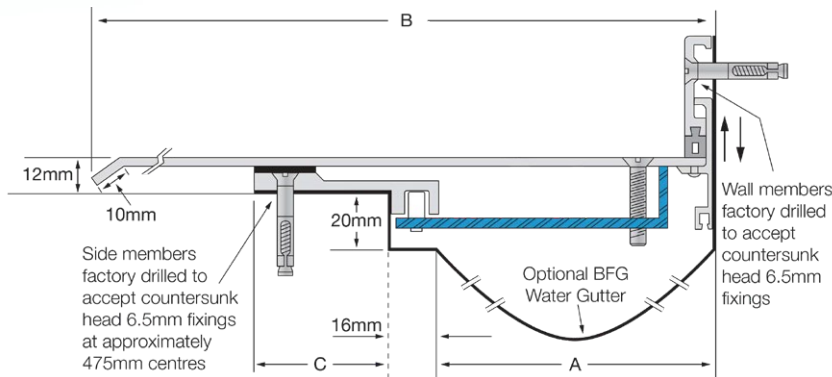

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
MLSM-100	100	264	48	+100/-85mm	185mm	28mm	3mm
MLSM-150	150	364	48	+150/-135mm	285mm	28mm	3mm
MLSM-200	200	464	48	+200/-185mm	385mm	28mm	3mm
MLSM-250	250	564	48	+250/-235mm	485mm	28mm	3mm
MLSM-300	300	664	48	+300/-285mm	585mm	28mm	3mm
MLSM-400	400	864	48	+400/-385mm	785mm	28mm	3mm
MLSM-500	500	1064	48	+500/-485mm	985mm	28mm	3mm
MLSM-600	600	1264	48	+600/-585mm	1185mm	28mm	3mm

## FEATURES

- Aluminium wall-to-ceiling expansion joint cover.
- Accommodates normal thermal movement as well as seismic movement.
- Designed to be surface mounted on walls and ceilings, to sit 5mm proud of the surface.
- The actual movement available will depend on the physical structural joint and installation width.

## MATERIALS


- Aluminium 6063-T5 mill finish alloy. (contact a Latham representative for anodising/powder coating options).
- Spring steel treated centering bar with elongated spherical rods (at ~475mm centres).
- Supplied in 3050mm lengths.

## FIXINGS

- Side and wall members pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

## FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional  
6-way movement



indoor & out-  
door use



BFG water  
gutter



fire rated (joint  
widths >50mm)



seismic  
movement

w [www.latham-australia.com](http://www.latham-australia.com)  
e [sales@latham-australia.com](mailto:sales@latham-australia.com)  
p +612 9879 7888