


Latham Seismic Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate XLCS



Illustrated: XLCS-150

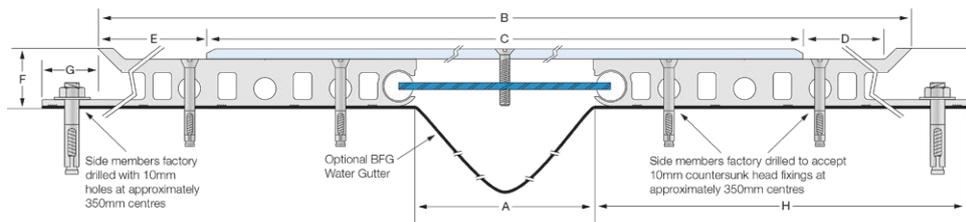

Stainless Steel Code	A	B	C	D	E	F	G	H	Movement	Total Available Movement	Cover Plate Thickness	Countersunk Head Fixings per 350mm centres
XLCS-150	150	490	320	75	85	34	30	200	+/-135mm	270mm	6mm	4
XLCS-200	200	640	420	100	110	34	30	250	+/-185mm	370mm	6mm	4
XLCS-250	250	796	520	125	138	37	30	306	+/-235mm	470mm	9mm	6
XLCS-300	300	946	620	150	163	37	30	356	+/-285mm	570mm	9mm	8
XLCS-400	400	1246	820	200	213	37	30	456	+/-385mm	770mm	9mm	10
XLCS-500	500	1550	1020	250	265	40	30	560	+/-485mm	970mm	12mm	12
XLCS-600	600	1850	1220	300	315	40	30	660	+/-585mm	1170mm	12mm	12



FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate.
- Accommodates normal thermal movement as well as seismic movement.
- Generally installed into a preformed recess.
- Contact your Latham representative to discuss custom manufacturing to suit exact requirements.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Spring steel treated centering bar with elongated spherical rods (at ~475mm centres).
- Supplied in 3050mm lengths.

FIXINGS

- Side members pre-drilled at ~350mm centres to accept countersunk head 10mm fixings.
- Side screw holes pre-drilled for 10mm non countersunk fixings.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)



seismic
movement

w www.latham-australia.com
e sales@latham-australia.com
p +612 9879 7888

LATHAM
design engineers & manufacturers