





Latham Ultimate Series Brass Expansion Joint Cover SAB (SSSM ▲)

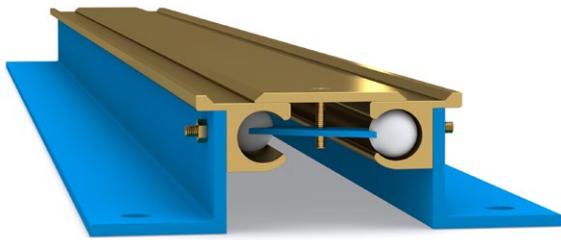

SAB-25 (SSSM ▲) to SAB-50 (SSSM ▲)

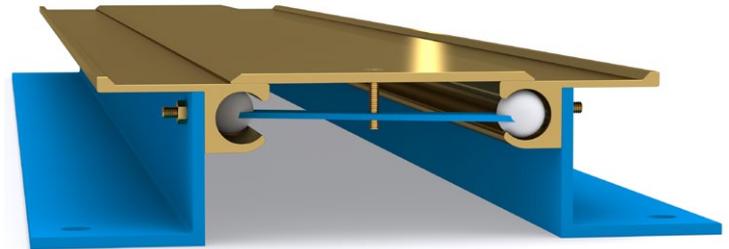

SAB-51 (SSSM ▲) to SAB-150 (SSSM ▲)

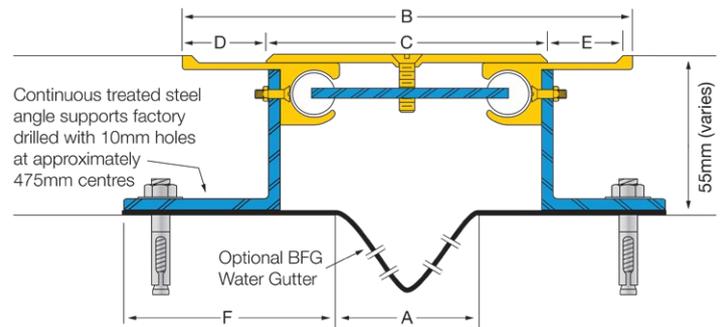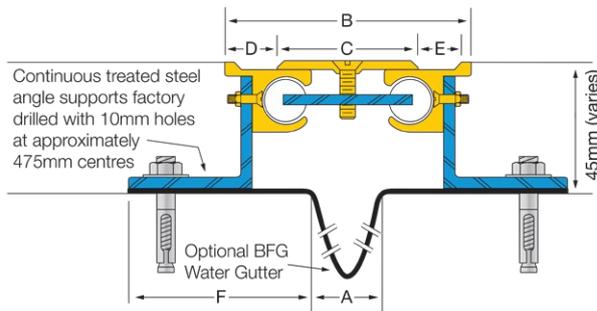

Brass Code smooth deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAB-25 (SSSM ▲)	25	87	50	18	12	•	+/-15mm	30mm	45mm	3mm
SAB-50 (SSSM ▲)	50	113	75	18	12	•	+15/-25mm	40mm	45mm	3mm
SAB-51 (SSSM ▲)	50	163	100	30	25	•	+/-40mm	80mm	55mm	3mm
SAB-75 (SSSM ▲)	75	189	125	30	25	•	+40/-50mm	90mm	55mm	3mm
SAB-100 (SSSM ▲)	100	214	150	30	25	•	+40/-50mm	90mm	55mm	5mm
SAB-150 (SSSM ▲)	150	264	200	30	25	•	+40/-50mm	90mm	55mm	5mm

▲ Specify required depth: 45mm, 55mm, 70mm, 80mm, 95mm, 105mm, 130mm & 155mm

• "F" distance subject to required depth



FEATURES

- Solid brass floor expansion joint cover.
- Robust system suited to pedestrian applications.
- Aluminium side member is installed on a continuous treated steel support, to allow for a variable floor depth below the finished floor (▲ - specify depth)
- Generally installed with paver/deep bed applications.

MATERIALS

- Brass 380 mill finish alloy.
- Treated steel angle supports.
- Supplied in 4000mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

FIXINGS

- Continuous treated steel support angles pre-drilled at ~475mm centres for 10mm fasteners.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)



factory
curvable