

Latham Wall-Line Series Aluminium Expansion Joint Cover


K




25K - 50K



75K - 150K

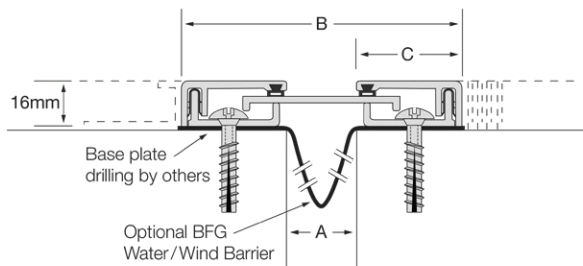

20 micron clear anodised finish (standard)
or brass colour anodised finish (specify brass colour finish).

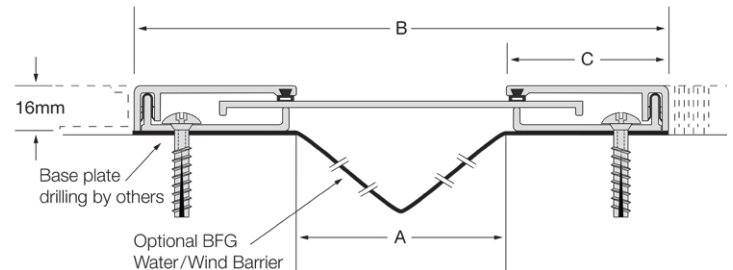

20 micron clear anodised finish (standard)
or brass colour anodised finish (specify brass colour finish).

Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth
25K	25	126	38	+/-23mm	46mm	16mm
50K	50	126	38	+/-23mm	46mm	16mm
75K	75	191	58	+/-45mm	90mm	16mm
100K	100	216	58	+/-45mm	90mm	16mm
150K	150	266	58	+/-45mm	90mm	16mm



FEATURES

- Aluminium wall & ceiling expansion joint cover.
- Installed flush internally with 16mm wall board or appear almost flush with 13mm board due to the curvature of the joint edge.
- Can also be installed surface mounted.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- All visual surfaces come with a 20 micron clear anodised finish (contact a Latham representative for alternative anodising or powder coating options).

FIXINGS

- Side base sections should be site drilled for fixings at ~450mm centres.
- Suitable fixings should be sourced to suit the substrate.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor & out-
door use



BFG water
gutter



fire rated (joint
widths >50mm)